

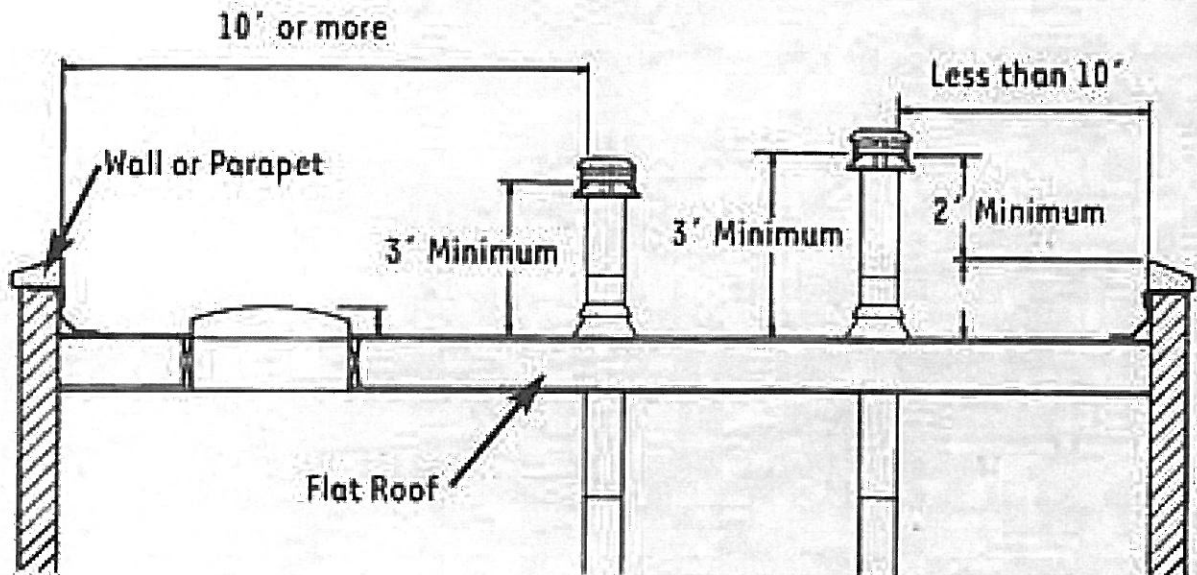


Wood Stoves

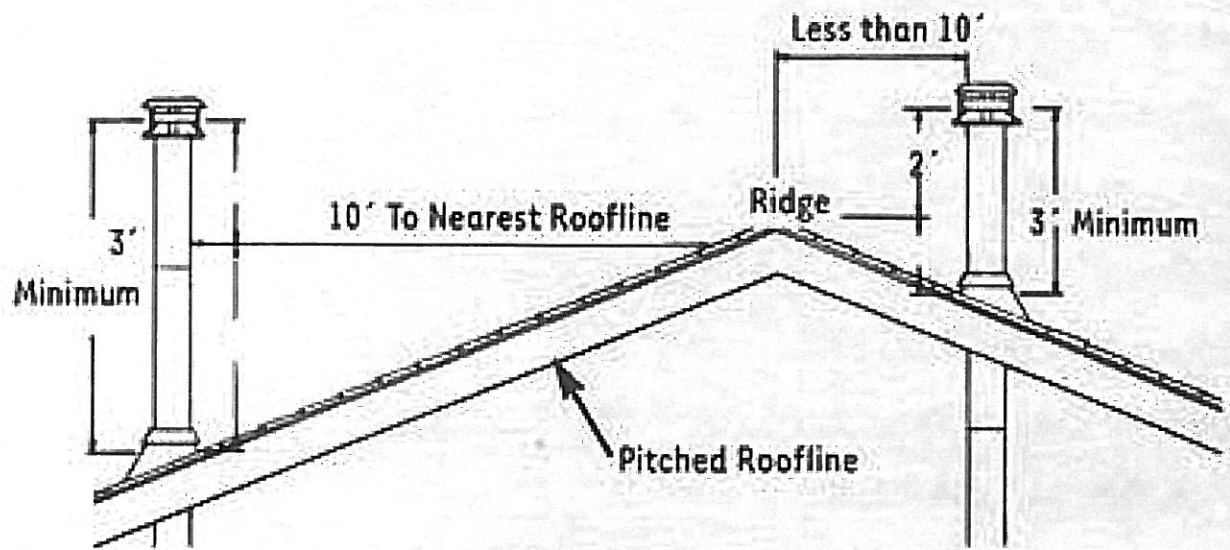


Minimum Chimney Height

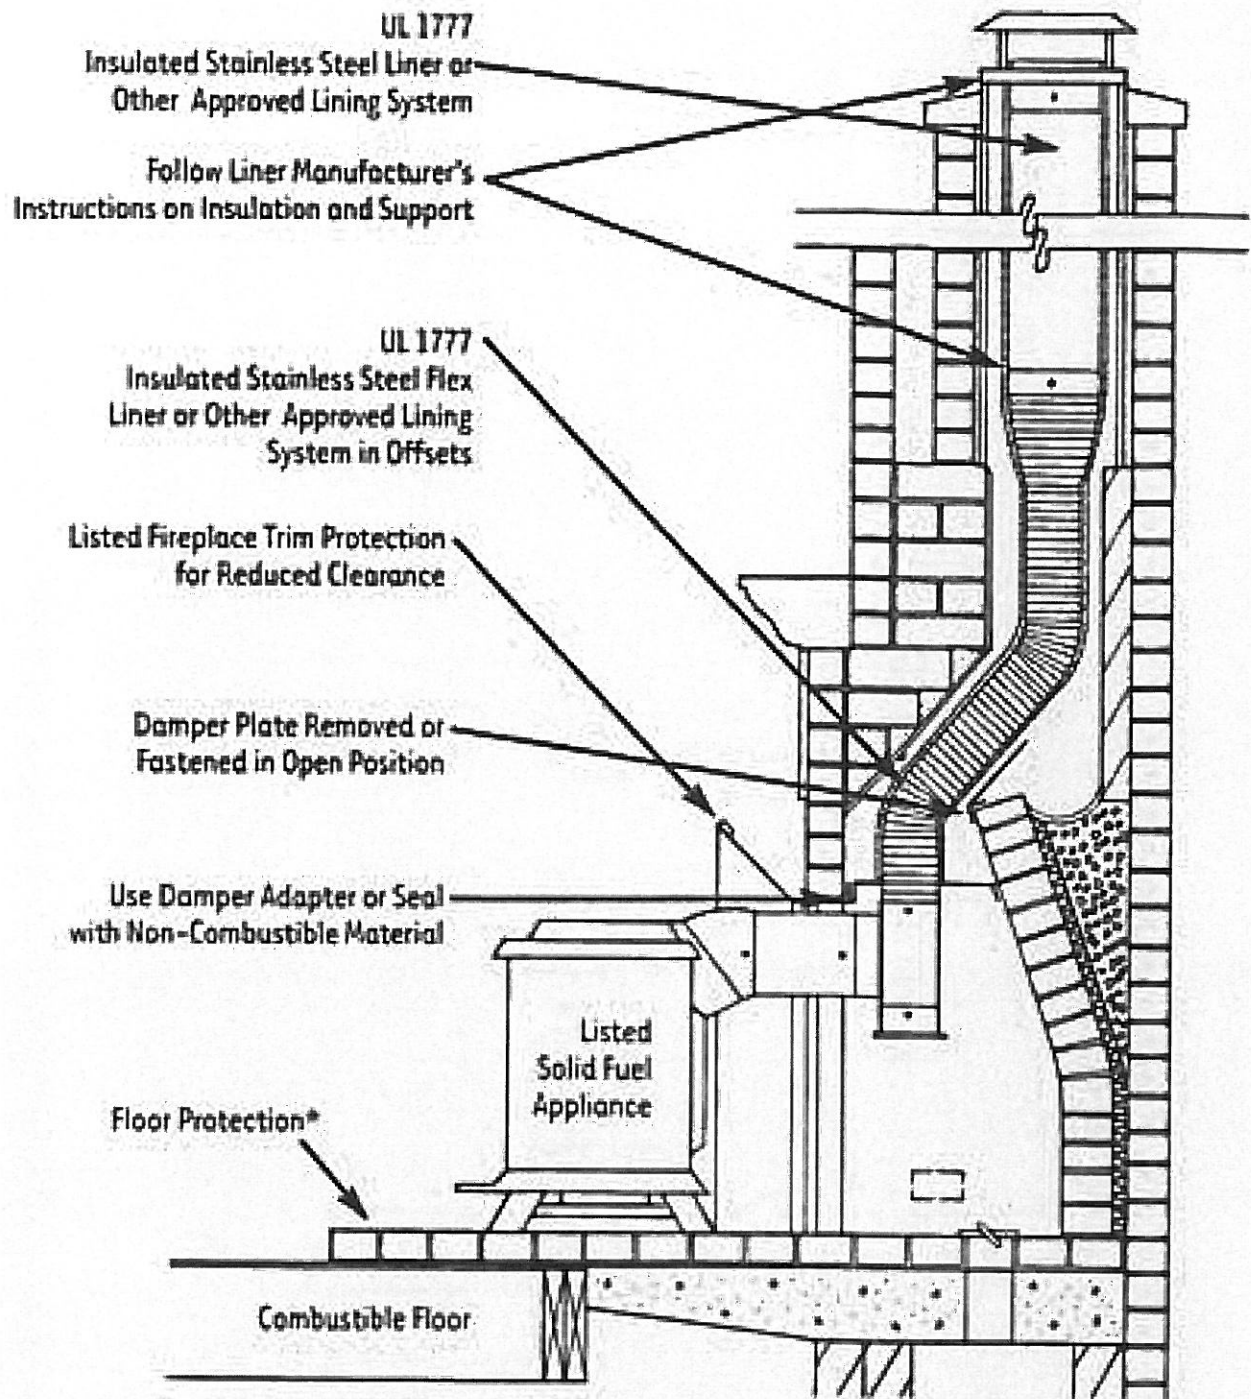


*Floor Protection in Accordance with Solid Fuel Appliance Listing


Full Relining Fireplace Conversion: Freestanding Appliance

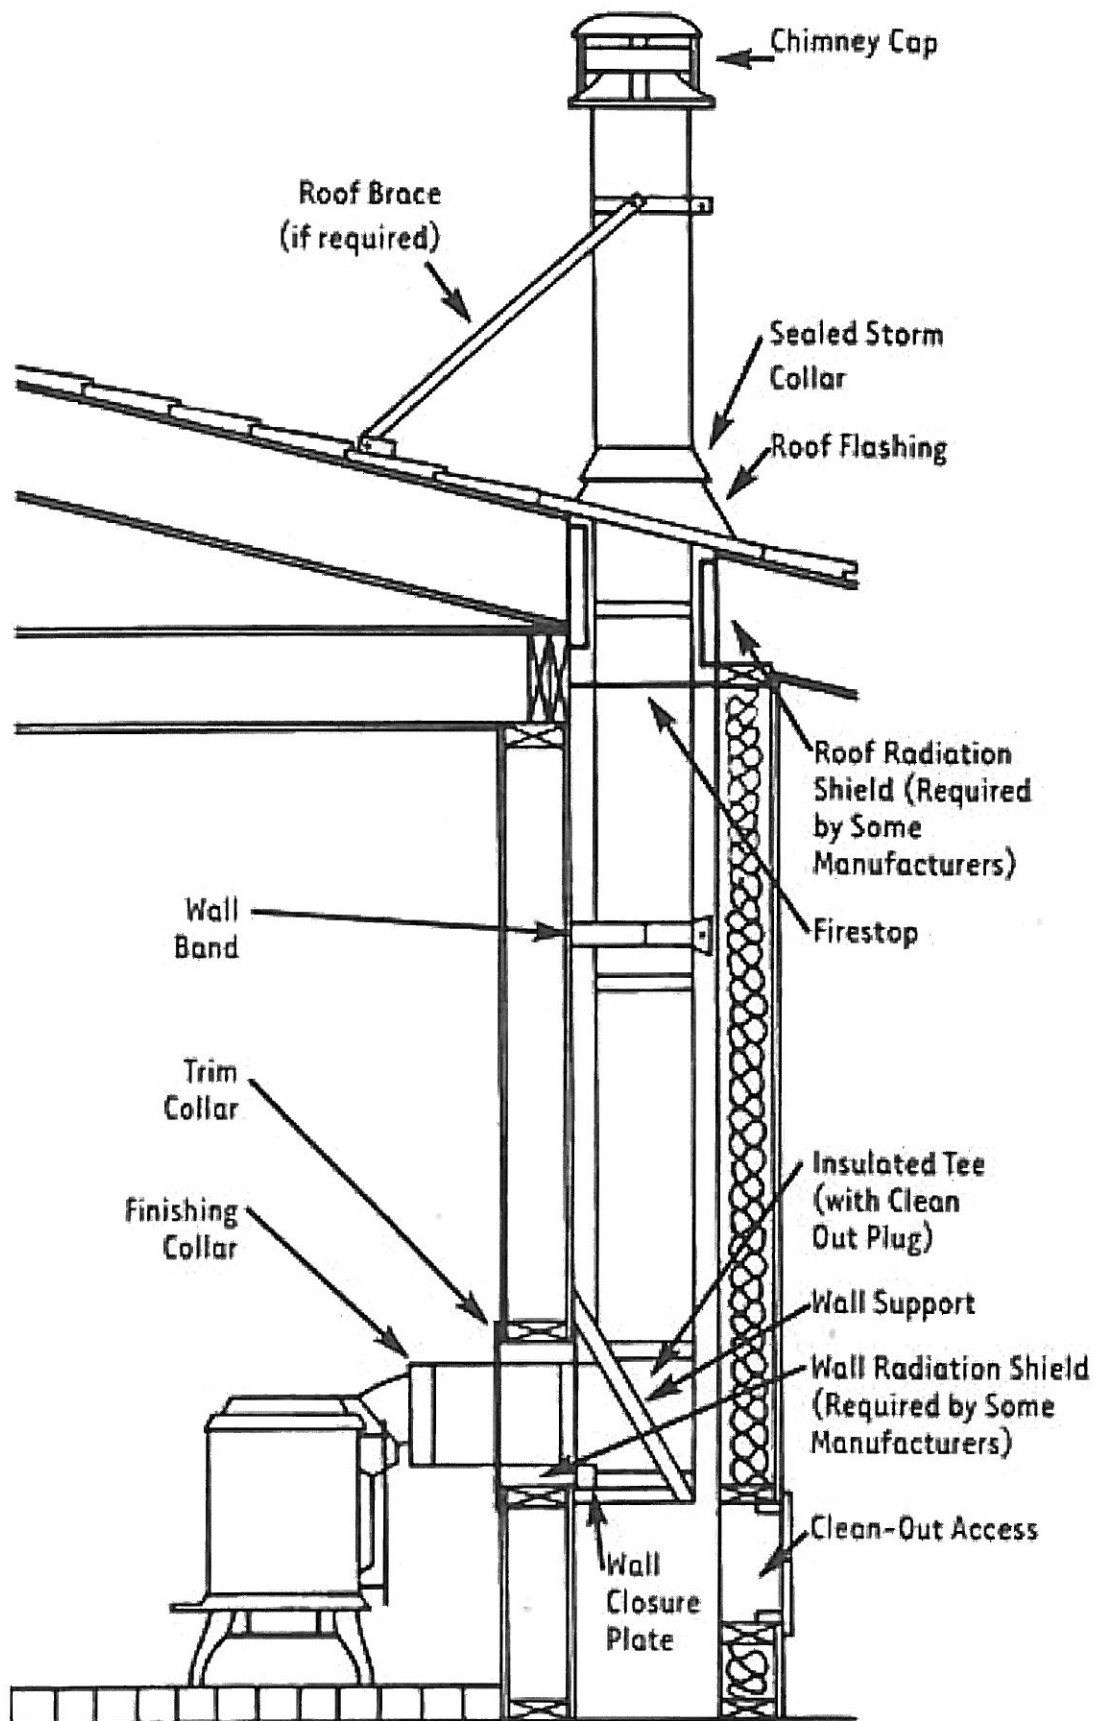


Through-the-Wall Installation — Factory-Built Chimney

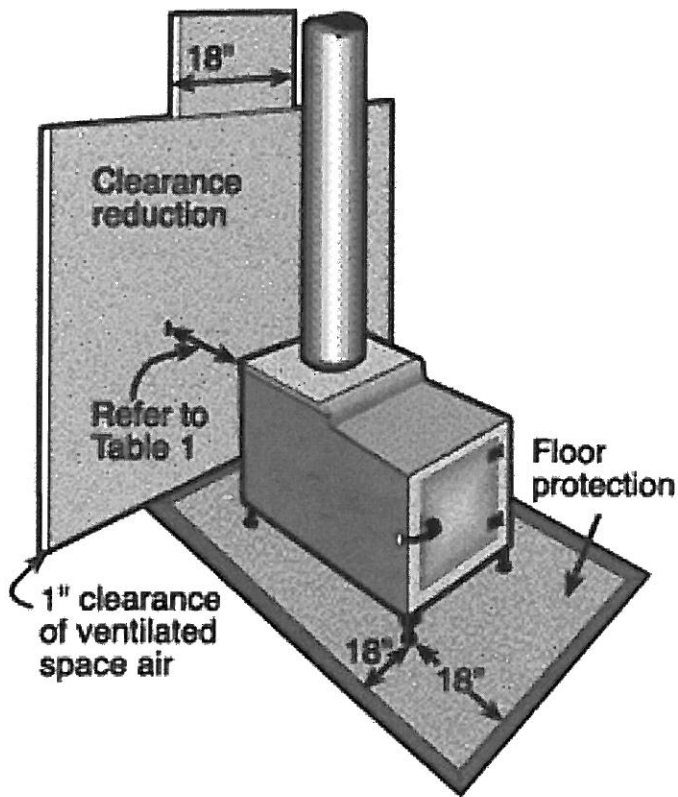


*** Manufacturers specifications may allow reduction of clearances. See your installation manual for specific clearances.**

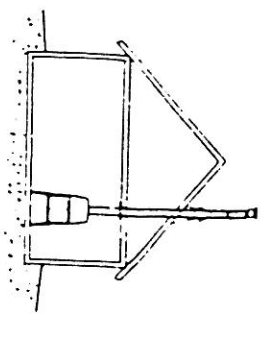


2

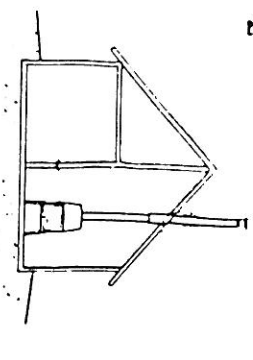


3

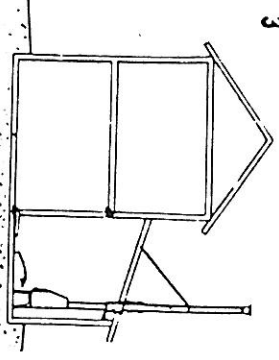


4

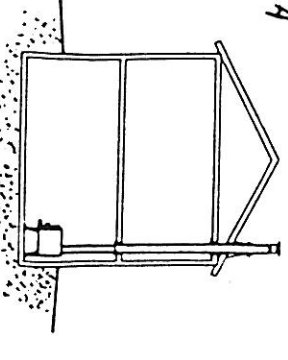


10' RULE-SAMPLES

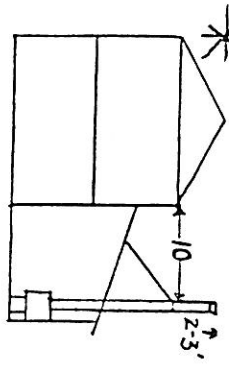


2-3' ABOVE 10' CLEARANCE




2-3' FT. ABOVE RIDGE




2-3' HIGHER THAN FLAT ROOF




WITHIN 10' FEET-2-3' HIGHER THAN RIDGE

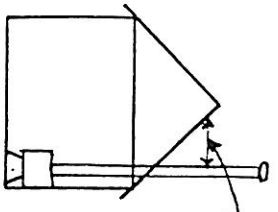


for proper draft-
TOTAL height must be
at least 15'

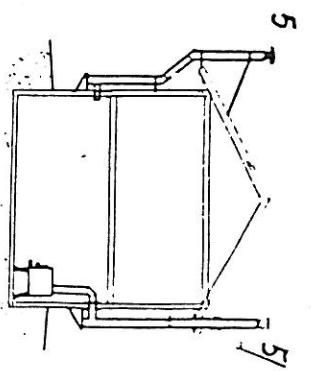


5

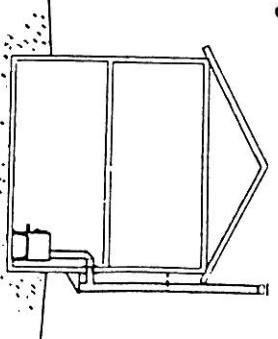

6

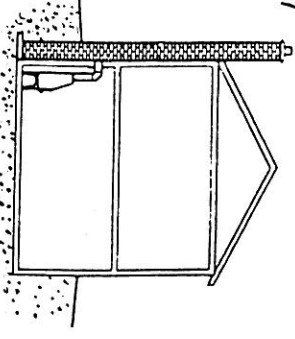

7



8